

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/000882

International filing date: 08 March 2005 (08.03.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB
Number: 0501541.7
Filing date: 27 January 2005 (27.01.2005)

Date of receipt at the International Bureau: 26 May 2005 (26.05.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



PCT/GB 2005 / 0 0 0 8 8 2



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

William Morell

Dated 13 May 2005

1890. 1891.



Patents Form 1/77

Patents Act 1977
(Rule 18)

Z7JAN05 EY58106-1 002834

P01/77FEE 30.00-0501541.7 ACCOUNT C

Request for grant of a patent

(An explanatory leaflet on how to fill in this form is available from the Patent Office)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ**Application number GB****0501541.7**1. Your reference:
(optional)

15916 TpCm

2. Full name, address and postcode of the applicant
or of each applicant (*underline all surnames*):Accentus plc
329 Harwell
Didcot
Oxfordshire OX11 0QJPatents ADP number (*if you know it*):

8132243007

If the applicant is a corporate body, give the
country/state of its incorporation:

England and Wales

3. Title of the invention:

Non-thermal plasma reactor

4. Name of your agent (*if you have one*):

Clare Josephine TALBOT-PONSONBY

"Address for service" in the United Kingdom
to which all correspondence should be sent
(*including the postcode*):Accentus plc
Patents Dept
329 Harwell
Didcot, Oxfordshire
OX11 0QJPatents ADP number (*if you know it*):

8132243001

5. Priority declaration: Are you claiming
priority from one or more earlier-filed
patent applications? If so, please give
details of the application(s):

Country

Application number
(*if you know it*)Date of filing
(*day / month / year*)6. Divisionals etc: Is this application a divisional
application, or being made following resolution
of an entitlement dispute about an earlier
application? If so, please give the application
number and filing date of the earlier application:

Number of earlier UK application

Date of filing
(*day / month / year*)

7. Inventorship: (Inventors must be individuals not companies)

(Please tick the appropriate boxes)

Are all the applicants named above also inventors?

YES ☐NO ☒

If yes, are there any other inventors?

YES ☒NO ☐

8. Are you paying the application fee with this form?

YES ☒NO ☐

Patents Form 1/77

Patents Form 1/77

9. Accompanying documents: not counting duplicates, please enter the number of pages of each item accompanying this form:

Continuation sheets of this form:

Description: 12

Claim(s): 2

Abstract: 1

Drawing(s): 5. + 5 RM

If you are not filing a description, please give details of the previous application you are going to rely upon:

Country

Application number

Date of filing
(day / month / year)

10. If you are also filing any of the following, state how many against each item.

Priority documents:

Statement of inventorship and right to grant of a patent (Patents Form 7/77):

Request for search (Patents Form 9A/77):

Request for substantive examination (Patents Form 10/77):

Any other documents:
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature(s):

Date: 27.1.05

12. Name, e-mail address, telephone,

Fax and/or mobile number, if any, Frances Espin frances.espin@accentus.co.uk 0870 190 2911
of a contact point for the applicant:

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you are resident in the United Kingdom and your application contains information which relates to military technology, or would be prejudicial to national security or the safety of the public, section 23 of the Patents Act 1977 prohibits you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 8 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

A leaflet on how to fill in this form is available from the Patent Office. If you would like a copy of the leaflet it is available on our website at <http://www.patent.gov.uk/patent/info/fact05.pdf> or alternatively you could telephone 08459 500505 or send an email to enquiries@patent.gov.uk to request a copy.

P.T. MANSFIELD

(on behalf of Accentus plc
by virtue of a Power of Attorney
dated 18th February 2003)

Patents Form 1/77

DUPLICATE

- 1 -

Non-Thermal Plasma Reactor

The present invention relates to a non-thermal plasma reactor comprising filter elements for the removal of particulates including carbonaceous particulates or soot from gases and in particular for the treatment of gaseous media such as exhaust gases from an internal combustion engine. Such products are encountered in the exhausts of internal combustion engines and effluent gases from incineration or other industrial processes, such as from the pharmaceutical, food-processing, paint manufacturing, dye manufacturing, textiles and printing industries. Coal-fired power stations and gas turbines also produce effluent gases which can be treated in this way.

There is a requirement for improved methods of trapping and removing particulates from exhaust gas streams. US patents 5,853,437 and 6,063,150 disclose a system where particulates are trapped on a filter. The filter is then regenerated by heating the filter to burn off the particulates. US 6,517,786 discloses a reactor where a plasma is used to regenerate the filter. One of the main challenges with achieving highly efficient filtration of particulates from gas streams is minimising the associated pressure drop across the filter caused by the build up of particulates, by successfully regenerating the filter, before the filter clogs up. When a filter is incorporated into a non-thermal plasma reactor the plasma may be generated continuously or intermittently when regeneration is required. The combination of a plasma with a substrate (for example, a filter material) that acts as a particulate trap is known.

- 2 -

US 6,517,786 discloses a non-thermal plasma reactor for the decomposition of pollutants which comprises a porous electrode arranged along the direction of flow of gas entering the reactor. The waste gas treated in the reactor is constrained to pass through the porous electrode which is designed so as to be permeable to gaseous components but acts as a filter for soot particles.

Reactors of this type have the potential to provide a significant reduction in the amount of particulate pollutants present in a gaseous medium. However, in practice a reactor of this type suffers from problems with back-pressure primarily due to the low surface area per volume of reactor. In order for the reactor to be able to treat all of the exhaust gas from, for example, a car, the reactor of the type disclosed in US 6,517,786 has to be large in order to provide a high enough surface area of porous electrode. This typically results in reactors which are too large to be of practical use.

The present invention aims to address this problem and seeks to provide a non-thermal plasma reactor which has a higher surface area of filter for a given volume of reactor.

Accordingly the present invention provides a non-thermal plasma reactor for the treatment of a gaseous medium comprising

a plurality of double-sided filter elements in a stack, the elements being connectable alternately to high voltage and earth, and

provided with a dielectric barrier between successive filter elements

- 3 -

wherein the gaseous medium is constrained to flow into the filter elements.

The reactor comprises a plurality of filter elements
5 such as two, three, four, five or more filter elements.
Preferably the reactor comprises a multiplicity of filter
elements such as ten, fifteen, twenty, thirty or more
filter elements. The number of filter elements required
10 in a particular reactor will vary depending on the size
of the elements, the space restraints on the size of the
reactor, the frequency of regeneration of the filters and
type of gaseous medium to be treated.

The filter elements are double-sided so as to
15 maximise the surface area of filter in the plasma volume
of the reactor. The reactor is typically arranged so
that the plasma forms over as large a proportion of the
filter area as possible. In one embodiment, the filters
at either end of the stack are single-sided and the outer
20 faces of these filters are solid as these faces of the
filter elements will not be remediated by plasma.

The filter elements comprise a conducting material.
The filter elements comprise a filter material which
25 traps particulates but is permeable to gas. Typically, as
large a proportion as possible of the filter element is
made of the filter material. However, parts of the filter
element may be solid in order to provide any necessary
stiffness to the element as a whole. Parts of the filter
30 element may be used to connect filter elements to one
another or to the reactor. For example, an annular filter
element may comprise a central part or ring which may be
referred to as a hub. The filter element may comprise
woven metal filter cloth, metal fibres, sintered metal
35 fibre material or sintered metal powder material. One
example of woven metal filter cloth is that made by G

- 4 -

Bopp & Co. Examples of sintered metal fibre materials are those obtainable from Porvair Filtration Group Limited - Microfiltrex (Fareham, UK) and Bekhaert (Belgium) made of stainless steel, Monel®, Inconel®, Hastelloy® and
5 Fecralloy®. Stainless steel discs made by sintering powder are available from Martin Kurz & Co Inc sold under the name Dynapore™ SPM™ and from Porvair Filtration Group Limited - Microfiltrex. Stainless steel is in general a preferred metal for the filter. Hastelloy® and Fecralloy®
10 are particularly preferred materials as well. Filters such as those described in WO 98/52671 are suitable for use in the present invention.

In a preferred embodiment the filter elements are
15 hollow.

The filter elements are typically substantially flat. In a preferred embodiment, the filters are annular, preferably the filters are flat and annular. In another
20 embodiment, the filters are rectangular, square, quadrilateral or another polygon such as a pentagon or hexagon.

The filter elements are attached to the structure of
25 the reactor in such a way that the space inside each filter element communicates only with a space that is outside the reactor. In this way gas that passes into the space inside the filter element can leave the reactor.

30 For example, where the filter elements are annular in shape, the outer can of the reactor is typically cylindrical. Gaseous medium enters the reactor and flows into the filter element. The filter elements may be connected together such that the space inside each filter
35 element communicates with a cylindrical chamber in the centre of the reactor which is divided from the reactor

- 5 -

space. Thus the gaseous medium must flow into the filter elements in order to leave the reactor through the central cylindrical chamber.

5 Where the filter elements are in the form of square, rectangular or other polygonal plates, the elements may all be connected to one wall of the reactor such that gaseous medium flowing into the reactor space leaves the reactor through that wall of the reactor.

10

 The filter elements are connectable to earth and high voltage by any suitable means. In one embodiment, the connections to earth and high voltage are within the filter elements, for example inside the hub of annular
15 filter elements. In another embodiment, some of the connections, such as the earth connections, may be achieved by connecting the filter elements to the outer can of the reactor.

20

 The dielectric barrier is a layer of material arranged to provide for a non-thermal plasma of the type referred to as a dielectric barrier type discharge, when an electrical power supply is connected to the filter elements to apply an electrical potential across the
25 space between adjacent filter elements. The dielectric material may be a ceramic material such as alumina or silica or any other ceramic material. Quartz, glass, glass-ceramic and a micaceous glass such as MICATHERM™ are also possible materials.

30

 Typically the top and bottom filter elements in the stack are connected to earth.

 In one embodiment, the space between the filter
35 elements is empty. The gaseous medium passes through the space but there is no filling material or catalytic

- 6 -

material in the space between the electrodes for it to pass through or over.

In another embodiment some or all of the space
5 between the filter elements is filled by a filling material. The filling material is any material which improves the performance of the reactor. It must be able to withstand the temperatures at which the reactor is operating. The filling material is a dielectric material.
10 Suitable materials include ceramic materials such as, but not exclusively, oxides for example aluminas, titanias, silicas, zirconia, glasses, glass ceramics, mixed oxides, complex oxides and metal doped oxides. An example of the latter is silver-doped alumina. The filling can be in the
15 form of spheres, pellets, extrudates, fibres, blanket, felt, sheets, wafers, frits, coils, foams, graded foams, membrane, ceramic honeycomb monolith or granules.

The filling material may act as a further filter
20 material, or as a support for a catalyst, or as a catalyst itself or a mixture thereof. Combinations of different catalysts can be used. Vanadates such as metavanadates and pyrovanadates and perovskites are examples of catalysts. Zeolites and metal containing
25 zeolites have a catalytic function. Examples of zeolites are ZSM-5, Y, beta, mordenite and examples of metals that can be used in metal containing zeolites are copper, silver, iron, cobalt. Promoting cations such as cerium and lanthanum can be present in the zeolite composition.
30 A preferred catalyst is silver doped alumina. The catalyst can be in the form of any of the shapes mentioned above for the filling material or as a coating on or contained within a dielectric material. A preferred filling material is a dielectric fibre material such as
35 Saffil (95% by weight alumina: 5% by weight silica) in

- 7 -

the form of, for example, a blanket or vacuum formed shape.

The filling material may be coated with a catalyst
5 such as a catalyst for the conversion of NO to NO₂ or NO_x
(NO and NO₂) to N₂ in order to improve the processing of
noxious exhaust gases in the gaseous medium. The filling
material or the filter element may be coated with a
catalyst for the conversion of carbon to carbon monoxide
10 and/or carbon dioxide.

The plasma may be generated continuously or
intermittently while gaseous medium passes through the
reactor. Two reactors may also be connected in parallel
15 and each reactor has gas passed through it in turn. A
plasma may then be generated in each reactor either
intermittently, for example when the gaseous medium for
treatment is passing through the other reactor or
continuously. Gaseous medium may also be passed through
20 two reactors in parallel simultaneously.

The present invention also provides a vehicle such
as a car, van, lorry or tank, comprising a reactor
according to the present invention. The present invention
25 also provides a ship comprising a reactor according to
the present invention. The present invention also
provides a power generation unit such as a combustion
engine generator e.g. Genset, comprising a reactor
according to the present invention.

30

The present invention also provides a method for
treating a gaseous medium to remove particulates
comprising passing the gaseous medium through a reactor
according to the present invention and generating a
35 plasma in the reactor intermittently or continuously.
The filter elements in the reactor are regenerated by the

- 8 -

plasma. Thus, the plasma is generated for as much time as necessary to regenerate the filter elements.

The present invention provides the use of a reactor
5 according to the present invention for the removal of
particulates from a gaseous medium. In particular the
present invention provides the use of a reactor according
to the present invention in a vehicle, power station or
other situation where exhaust or effluent gases are
10 produced.

Specific constructions of reactors embodying the
invention will now be described by way of example and
with reference to the drawings filed herewith, in which:
15

Figure 1 is a diagrammatic cross-sectional view of a
reactor according to the present invention,

Figure 2 is a diagrammatic plan view of a filter 5
20 as shown in Figure 1,

Figure 3 is a diagrammatic plan view of a filter 3
as shown in Figure 1,

Figure 4 is a diagrammatic cross-sectional view of a
25 reactor according to the present invention,

Figure 5 is a plan view of the hub of an annular
filter as used in the present invention, and
30

Figure 6 is a diagrammatic cut-away view of the hub
of the annular filter as shown in Figure 5.

Figure 1 shows a reactor according to a preferred
35 embodiment of the present invention where the double-
sided filter elements 3 and 5 are in the form of annular

- 9 -

discs. The reactor comprises an outer conducting can 1 which acts as the earth connection 2 for those filter elements 3 which are connected to earth. The reactor comprises twenty-one, thirty-one or more filter elements as necessary of which only five filter elements 3,5 are shown and are connected to earth and high voltage respectively. The filter elements 3 are connected to the outer can of the reactor 2 by tabs 4 at points around the circumference of the filter elements. The intervening filter elements 5 are connected to a high voltage connection 6 by spokes 7 in the centre of the reactor. A dielectric barrier 8 is positioned between each successive filter element 3,5. The dielectric barriers 8, filters 3 and 5 and the annuli 9 of dielectric material together define a central cylindrical space 10 in the centre of the reactor. In another embodiment of the present invention each dielectric barrier 8 and the adjacent annuli 9 may together form a single component (not shown). Gas flowing into the reactor follows the path shown by the arrows in Figure 1. The gas passes around the outer edges of the filter elements 3,5 and the dielectric barriers 8 and into the spaces 11 between the filter elements 3,5 and the dielectric barriers 8. Plasma is formed in the space 11 during operation of the reactor. Any particulates in the gas are trapped on the filter surfaces where they can be remediated by the plasma. The gas passes into the space 14 inside the filter elements 3,5. From the space 14 the gas flows into the central space 10 in the centre of the reactor and then leaves the reactor in the direction of the arrows. The structures 12 and 15 (shown schematically) form barriers at either end of the reactor and constrain the gas to flow through the filter elements when passing through the reactor. The high voltage connection 6 is insulated from the reactor can 1 by the insulating structure 13.

- 10 -

The distance between the end 16 of the filters 5 connected to high voltage and the can of the reactor 2 is such that an arc discharge does not form across this space.

Figure 2 shows a plan view of a filter 5 as shown in the reactor of Figure 1. The filter 5 is annular in shape. The filter is connected to a high voltage supply via the spokes 7 and conductor 6 in the centre of the annulus.

Figure 3 shows a plan view of a filter 3 connected to earth as shown in the reactor of Figure 1. The connection to earth is made via tabs 4 which are connected to the outer can of the reactor (not shown).

Figure 4 shows another embodiment of the present invention where the filter elements 21,22 are in the form of flat plates which may be square, rectangular or in the shape of another polygon regular or irregular. Figure 4 shows a cross-section through the reactor. The reactor comprises five filter elements 21,22. Three of the filter elements 21 are connected to the outer can of the reactor 26, which is earthed, by tabs 25 attached to one side of the filter. The remaining two filter elements 22 are connected to a high voltage connection (not shown) through the channel 28. Each filter element is separated from the next by a dielectric barrier 23. The dielectric barriers 23, insulating blocks 27 and the filter elements 21,22 make up the side of the reactor shown on the right hand side of the Figure. Gas passing into the reactor follows the path shown by the arrows and passes round the ends of the filter elements and into the space 24 between the filters elements 21,22 and the dielectric barriers 23. Plasma forms in the space 24 when the reactor is in

- 11 -

use. The gas passes into the filter elements and then leaves the reactor through channel 28.

It will be appreciated that Figures 1 and 4 only show two examples of a reactor according to the present invention. The reactors may contain more or fewer filter elements. The reactors shown in Figures 1 and 4 show the top and bottom filter elements connected to earth. However, the top and/or bottom filter elements may be connected to high voltage if required though this will typically require a large distance between the filter element and the can of the reactor or any adjacent conductor so as to prevent arc discharges from occurring.

The distance between the edge of the filter elements 16, 22 connected to high voltage and the outer can connected to earth is such that an arc discharge does not occur across the gap. The necessary gap is typically in the range of 1 inch (0.0265 m) per 10 kV of applied voltage in air.

An alternative way to make electrical connections to the filter elements 3 and 5 is shown in Figures 5 and 6, to which reference is now made.

25

Figure 5 shows the hub 52 of an annular filter element (not shown in Figure 5). The hub 52 incorporates two inwardly projecting conducting tabs 53. The filter element is separated from the next filter element in the stack by an insulating dielectric plate 56. Rods 54 and 55 pass through the dielectric plate 56. The rods 54 also pass through the tabs 53, and provide an electrical connection to the tabs. The rods 54 are connected to a high voltage supply (not shown), for example at one end of the stack. An adjacent filter element can be connected through further projecting conducting tabs 63 to rods 55

- 12 -

which are at earth potential. Thus alternate filter elements are at high voltage and earth potential.

Figure 6 shows a cut-away perspective view of the
5 hubs 52,62 of two adjacent filter elements 57,67. The
hubs 52,62 are perforated by radial holes 58. The lower
filter element 57 has a hub 52 with inwardly projecting
conducting tabs 53 connected to the rods 54. The upper
filter element 67 has a hub 62 with tabs 63 connected to
10 the rods 55. A dielectric plate 66 insulates the hubs 52
and 62 from one another and extends beyond the outer
diameter of the filter elements 57,67. Below the hub 52
is a further dielectric layer 56. This arrangement can
be repeated to form a larger stack of filter elements.
15 The rods 54 are connected to high voltage and the rods 55
are connected to earth or vice versa.

In use the exhaust gases enter the filter elements
57,67 in a similar way to that described above in
20 relation to Figure 1, and the filtered exhaust gas enters
the hub 52,62 of the reactor through radial holes 58. The
exhaust gases then flow along the stack in the hubs so as
to leave the reactor.

- 13 -

Claims

1. A non-thermal plasma reactor for the treatment of a
gaseous medium comprising
5 a plurality of double-sided filter elements in a stack,
the elements being connectable alternately to high
voltage and earth, and
10 provided with a dielectric barrier between successive
filter elements
wherein the gaseous medium is constrained to flow into
the filter elements.
15 2. A reactor according to claim 1 wherein the filter
elements are annular.
3. A reactor according to claim 1 or 2 wherein the
20 filter elements are hollow.
4. A vehicle, ship or power generation unit comprising
a reactor according to any one of claims 1 to 3.
25 5. A method for treating a gaseous medium to remove
particulates comprising passing the gaseous medium
through a reactor according to any one of claims 1 to 3
and generating a plasma in the reactor intermittently or
continuously.
30 6. Use of a reactor according to any one of claims 1 to 3
for the removal of particulates from a gaseous medium.

- 14 -

7. A reactor substantially as hereinbefore described
with reference to any one of the drawings.

5 15916 TpCm

C J Talbot-Ponsonby
Chartered Patent Agent
Agent for the Applicant


- 15 -

Abstract

Non-Thermal Plasma Reactor

- 5 A non-thermal plasma reactor for the treatment of a
gaseous medium comprising
- a plurality of double-sided filter elements in a stack,
the elements being connectable alternately to high
10 voltage and earth, and
- provided with a dielectric barrier between successive
filter elements
- 15 wherein the gaseous medium is constrained to flow into
the filter elements.

15916 TpCm

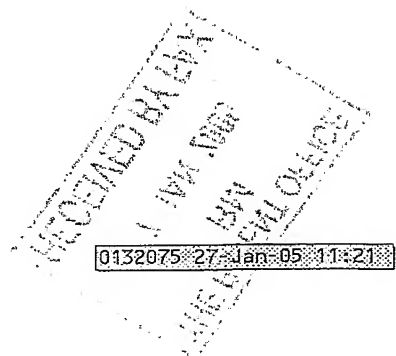




Accentus plc

Sheet 1 of 5

115

Fig.1.

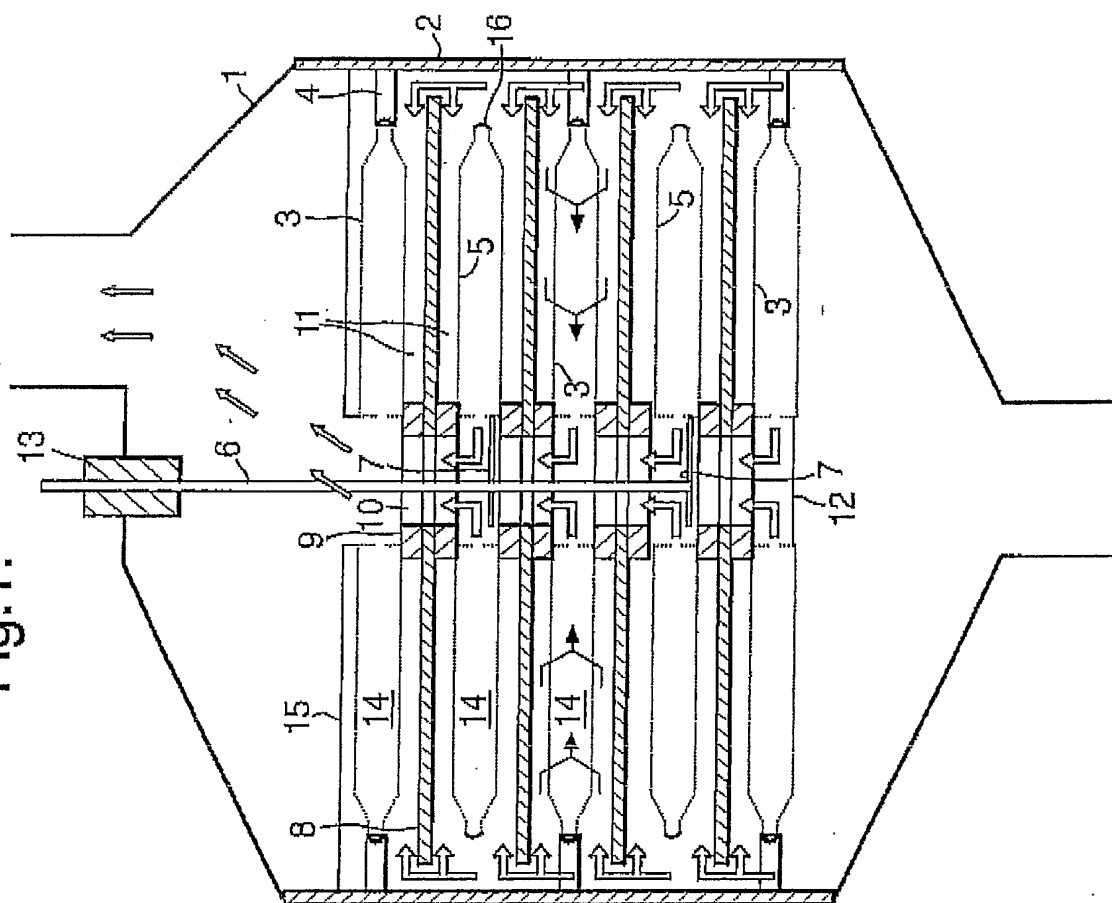

15916 TpCm

C.J. Talbot-Ponsonby
Chartered Patent Agent
Agent for the Applicants

0132075 27-Jan-05 11:21



Accentus plc

Sheet 2 of 5

2/5

Fig.2.


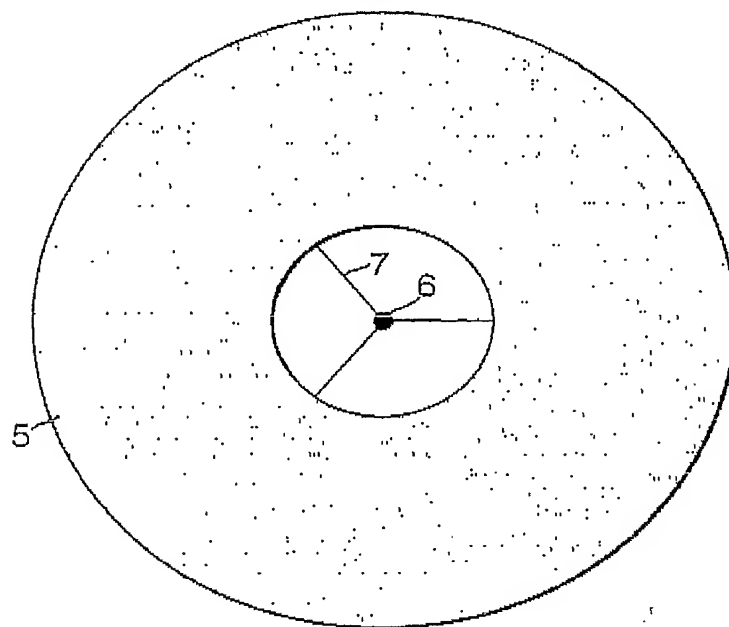


Fig.3.



15916 TpCm

C.J. Talbot-Ponsonby
Chartered Patent Agent
Agent for the Applicants

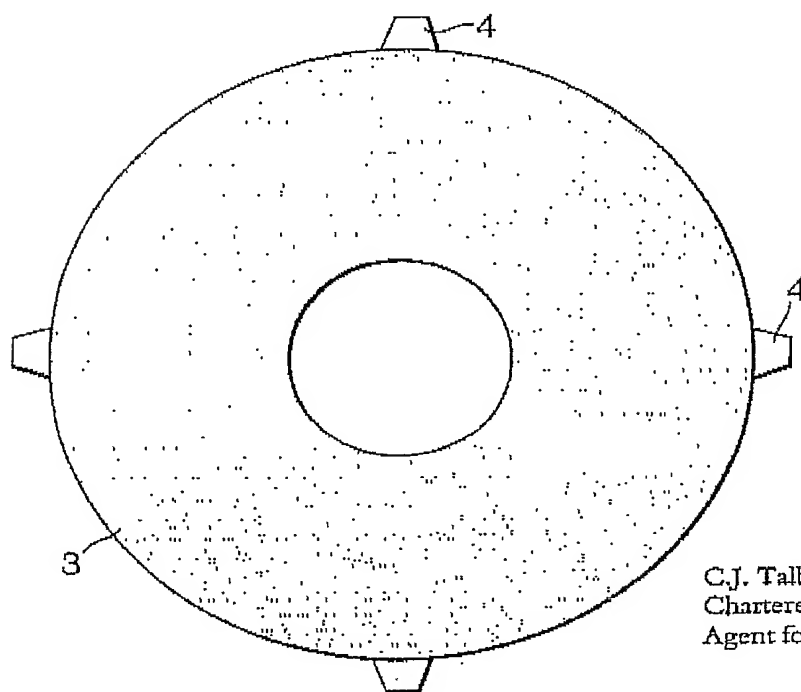


Accentus plc

Sheet 3 of 5

3/5

Fig.4.

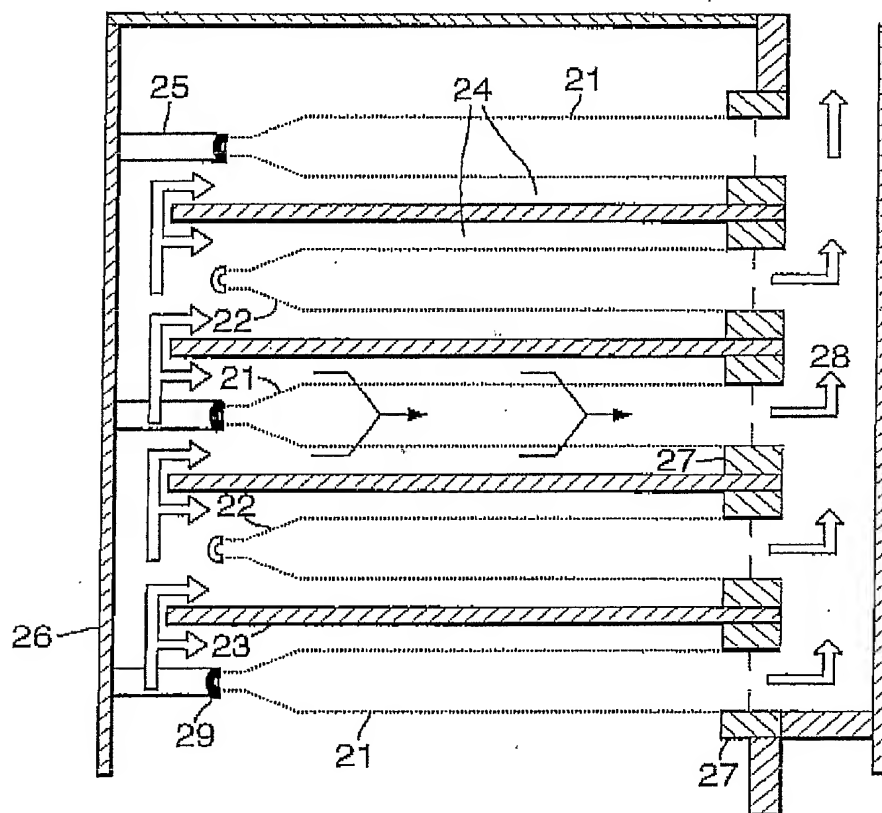

15916 TpCm

C.J. Talbot-Ponsonby
Chartered Patent Agent
Agent for the Applicants

0132075 27 Jan 05 11:21






Accentus plc

Sheet 5 of 5

5/5

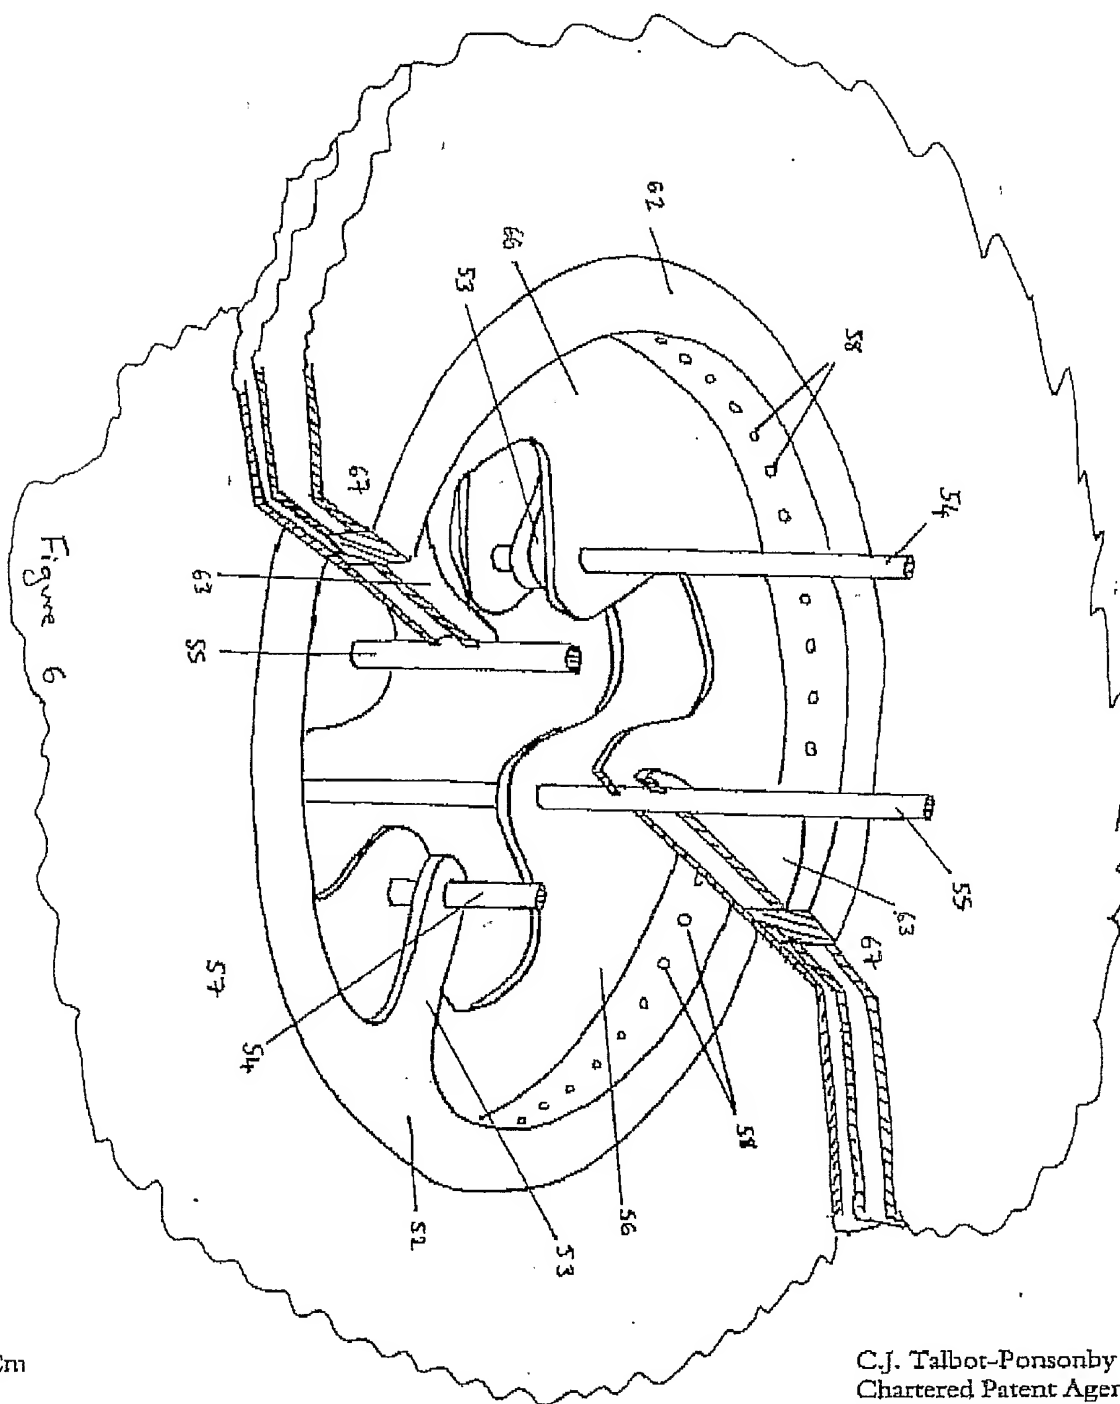

15916 TpCm

C.J. Talbot-Ponsonby
Chartered Patent Agent
Agent for the Applicants

